

Model No.		QL10403EARY	QL10403FARY	QL10503HARY	QL10703KARY
<b>Wheelbase</b>					
Wheelbase	(mm)	2490	2765	3360	3815
<b>Drive Type</b>					
4 × 2					
<b>Weight&amp; Capacities</b>					
GVW	(kg)	4200	4380	5250	7130
Curb Weight	(kg)	1680	1810	1850	2050
Pay Load	(kg)	2000 ~ 4500			
<b>Cabin</b>					
Type	Single				
Driver & Passenger	1+1				
<b>Engine</b>					
Model	4JB1-CN				
Type	4 cylinders in line, turbo charging, inter cooling, high pressure common-rail diesel injection system, liquid-cooled engine				
Emission Standard	EURO IV				
Displacement	(L)	2.771			
Rated Power	(kw/rpm)	72(98hp)/3400			
Max. Torque	(N.m/rpm)	220/1700			
<b>Transmission</b>					
Model	manual, ISUZU MSB-5S	manual, ISUZU MSB-5MT,(5 forward+1 reverse)			
Gear Ratio	5.016/2.524/1.489/1.000/0.713/R:4.783	5.594/2.814/1.660/1.000/0.794/R:5.334			
<b>Clutch</b>					
Type	dry,single plate with cushioning spring				
<b>Axle Load</b>					
Front (type)	reverse Elliot "I" beam				
Front	(T)	2.2	2.5	2.5	2.5
Rear (type)	Banjo,full floating type				
Rear	(T)	3	4.8	4.8	4.8

Model No.		QL10403EARY	QL10403FARY	QL10503HARY	QL10703KARY
<b>Frame</b>					
Type		ladder type			
Width	(mm)	800	700	700	700
<b>Suspensions</b>					
Front	(type)	semi-elliptical, leaf spring, double acting telescopic shock absorber			
Front	(quantity)	6		8	
Rear	(type)	semi-elliptical, Alloy steel leaf spring, double acting telescopic shock absorber			
Rear	(quantity)	3+2		6+5	
<b>Fuel system</b>					
Fuel Type		diesel			
Fuel Tank Capacity		75L	100L	100L	100L
<b>Brake System</b>					
service		drum brake, vacuum servo hydraulic, (ABS optional)			
Parking		mechanical parking brake			
<b>Tires</b>					
Front Tire		7.00R15,10PR	6.50R15,10PR	7.00R15,10PR	7.00R16,14PR
Rear Tire		7.00R15,10PR	6.50R15,10PR	7.00R15,10PR	7.00R16,14PR
<b>Electrical System</b>					
Battery		12V 70A; parallel connection			
Alternator		12V 60A			
<b>Performance</b>					
Max. Speed	(km/h)	98-110	98-110	98-110	98-110
Min. Ground Clearance	(mm)	≥190			
Min. Turning Radius	(m)	10.4	12	13.6	15.2
Approaching/Departure Angle	( ° )	24/20	24/16	24/16	24/14
<b>Configurations</b>					
A/C		●	●	●	●
Power Steering		●	●	●	●
Radio		●	●	●	●
Spare Tire&tool kit		●	●	●	●
Safety Belt		●	●	●	●
ABS		○	○	○	○

### Model No.


QL10403EARY

QL10403FARY

QL10503HARY

QL10703KARY

### Dimensions

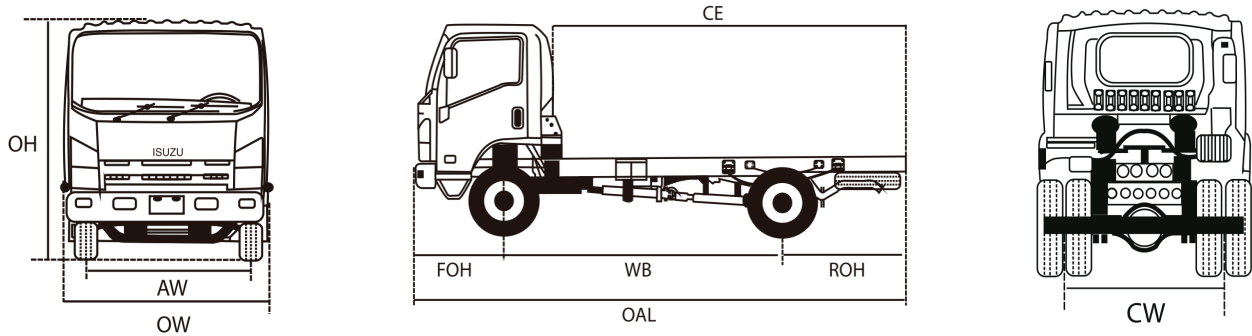

Wheelbase	WB	(mm)	2490	2765	3360	3815
Overall Length	OAL	(mm)	4605	5230	5900	6645
Overall Width	OW	(mm)	1695	1860	1860	1880
Overall Height	OH	(mm)	2105	2180	2180	2220
Front Overhang	FOH	(mm)	1015	1015	1015	1015
Rear Overhang	ROH	(mm)	1100	1450	1525	1815
Front Tread	AW	(mm)	1385	1385	1385	1504
Rear Tread	CW	(mm)	1395	1425	1425	1425

#### Remark:

- means standard configuration.
- All above information is for reference only, and will be updated timely without notice;
- The listed models are part of the full products range, any special request will be available on request.

